



## GREEN – 16.25

Application areas: building, greenhouses and gardening, sports fields


Type: leveler extensible blade  
 Min. required power: 50 HP  
 Max required power: 120 HP  
 Overall length: 2,65 m  
 Overall width: 2,50 m  
 Working width: 1,60 m – 2,50 m  
 Maneuver width: 1,60 m  
 Work wheel track: 2,00 m  
 Maneuver wheel track: 1,50 m  
 Wheels height: 0,84 m  
 Blade height: 1,00 m  
 Coupling hook high: 0,45 m  
 Estimated weight: 1.250 kg  
 Frame design: monotrave  
 Opening blade system: hydraulic  
 Folding blade: no  
 Extensible blade: yes  
 Opening axles system: telescopic  
 Extensible axles: yes  
 Oil filter: cartridge  
 Balancer (wheels): n°2 stabilising wheels  
 Slope of the blade: manual  
 Lights system: yes  
 Receiver mast: n° 1 hydraulic extensible  
 reading of the quota  
 Control box: digit  
 Adjustment of the cutting blade angle: yes  
 Earth volume per run: 3 m<sup>3</sup>  
 Finishing speed (km/h): 4 km/h  
 Transport distance (m): 80 m  
 Laser system: hydraulic independent  
 Ready for laser system: yes  
 Ready for GPS system: yes  
 Laser system precision on 1300 m (diameter): ± 2 mm  
 GPS system precision on 10 km (diameter): ± 10 mm

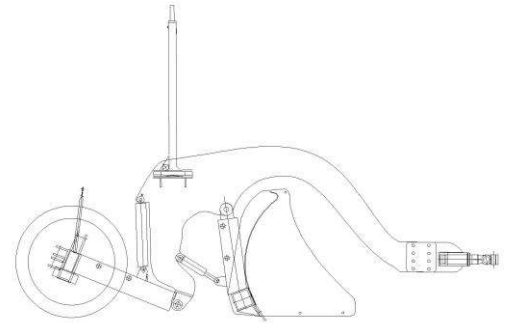


Overall length




Working width



Maneuver width



Work wheel track



Blade height