


MASTER – 50

Application areas: agriculture, earth moving

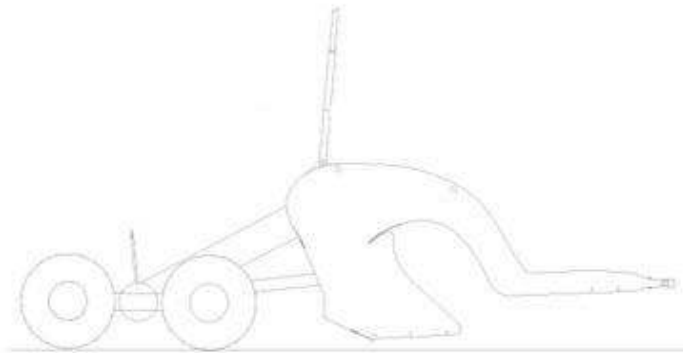

Type: leveler

Min. required power: 130 HP

Max required power: 200 HP

Overall length: 6,10 m

Overall width: 5,00 m

Working width: 5,00 m

Maneuver width: 2,50 m

Work wheel track: 3,50 m

Maneuver wheel track: 2,50 m

Wheels height: 0,84 m

Blade height: 1,00 m

Coupling hook high: 0,50 m

Estimated weight: 3.200 kg

Frame design: with double plates

Opening blade system: hydraulic

Back folding blades: yes

Extensible blade: no

Opening axles system: telescopic

Extensible axles: yes

Oil filter: cartridge

Balancer (wheels): n°2 balancer with 2 wheels

Slope of the blade: manual

Variable attack angle: yes

Lights system: yes

Receiver mast: n° 1 hydraulic extensible

reading of the quota

Control box: digit

Adjustment of the cutting blade angle: yes

Earth volume per run: 6,50 m³

Finishing speed (km/h): 8 km/h

Transport distance (m): 100 m

Laser system: hydraulic independent

Ready for laser system: yes

Ready for GPS system: yes

Laser system precision on 1300 m (diameter): ± 2 mm

GPS system precision on 10 km (diameter): ± 10 mm

