


MASTER – 60

Application areas: agriculture, earth moving

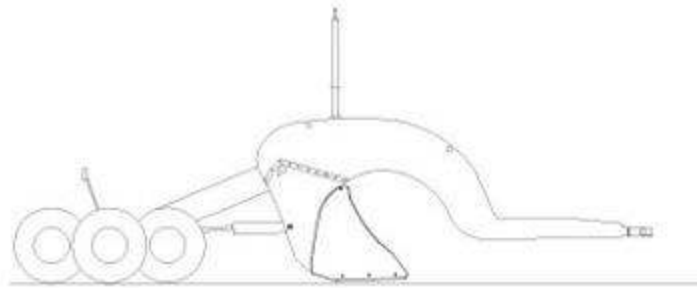

Type: leveler

Min. required power: 180 HP

Max required power: 350 HP

Overall length: 7,55 m

Overall width: 6,00 m

Working width: 6,00 m

Maneuver width: 2,50 m

Work wheel track: 5,60 m

Maneuver wheel track: 2,50 m

Wheels height: 0,84 m

Blade height: 1,00 m

Coupling hook high: 0,50 m

Estimated weight: 4.600 kg

Frame design: with double plates

Opening blade system: hydraulic

Back folding blades: yes

Extensible blade: no

Opening axles system: butterfly

Extensible axles: yes

Oil filter: cartridge

Balancer (wheels): n°2 balancer with 3 wheels

Slope of the blade: hydraulic

Variable attack angle: yes

Lights system: yes

Receiver mast: n° 1 hydraulic extensible

reading of the quota

Control box: digit

Adjustment of the cutting blade angle: yes

Earth volume per run: 7 m³

Finishing speed (km/h): 12 km/h

Transport distance (m): 110 m

Laser system: hydraulic independent

Ready for laser system: yes

Ready for GPS system: yes

Laser system precision on 1300 m (diameter): ± 2 mm

GPS system precision on 10 km (diameter): ± 10 mm

