



## TECH – 24.33

Application areas: roads


Type: leveler extensible blade  
 Min. required power: 80 HP  
 Max required power: 150 HP  
 Overall length: 2,80 m  
 Overall width: 3,30 m  
 Working width: 2,40 m – 3,30 m  
 Maneuver width: 2,40 m  
 Work wheel track: 2,90 m  
 Maneuver wheel track: 2,00 m  
 Wheels height: 0,84 m  
 Blade height: 1,00 m  
 Coupling hook height: 0,50 m  
 Estimated weight: 1.950 kg  
 Frame design: monotrave  
 Opening blade system: hydraulic  
 Folding blade: no  
 Extensible blade: yes  
 Opening axles system: telescopic  
 Extensible axles: yes  
 Rear axle: n° 2 independent frames  
 Pump: n° 2  
 Oil filter: cartridge  
 Balancer (wheels): n°2 balancer with 2 wheels  
 Slope of the blade: manual  
 Lights system: yes  
 Receiver mast: n° 2 hydraulic extensible  
 reading of the quota  
 Control box: digit  
 Adjustment of the cutting blade angle: yes  
 Earth volume per run: 3,90 m<sup>3</sup>  
 Finishing speed (km/h): 7 km/h  
 Transport distance (m): 100 m  
 Laser system: n° 2 hydraulic independent  
 Ready for laser system: yes Ready for  
 GPS system: yes  
 Laser system precision on 1300 m (diameter): ± 2 mm  
 GPS system precision on 10 km (diameter): ± 10 mm

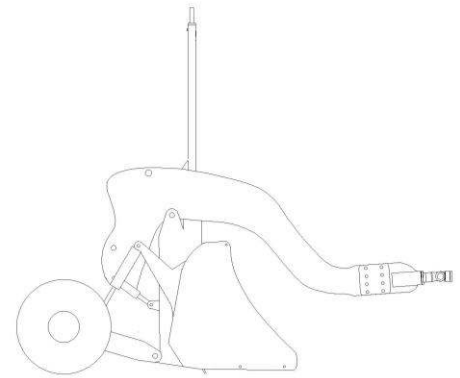


Overall length




Working width



Maneuver width



Work wheel track



Blade height