

TECH – 25

Application areas: roads, sports fields

Type: leveler

Min. required power: 50 HP

Max required power: 120 HP

Overall length: 2,65 m

Overall width: 2,50 m

Working width: 2,50 m

Maneuver width: 2,50 m

Work wheel track: 2,00 m

Maneuver wheel track: 2,00 m

Wheels height: 0,84 m

Blade height: 1,00 m

Coupling hook high: 0,45 m

Estimated weight: 1.300 kg

Frame design: monotrave

Opening blade system: fix

Folding blade: no

Extensible blade: no

Opening axles system: fix

Extensible axles: no

Rear axle: n° 2 independent frames

Pump: n° 2 Oil filter: cartridge

Balancer (wheels): n°2 stabilising wheels

Slope of the blade: manual

Lights system: yes

Receiver mast: n° 2 hydraulic extensible

reading of the quota

Control box: digit

Adjustment of the cutting blade angle: yes

Earth volume per run: 3 m³

Finishing speed (km/h): 4 km/h

Transport distance (m): 80 m


Laser system: n° 2 hydraulic independent

Ready for laser system: yes


Ready for GPS system: yes

Laser system precision on 1300 m (diameter): ± 2 mm


GPS system precision on 10 km (diameter): ± 10 mm

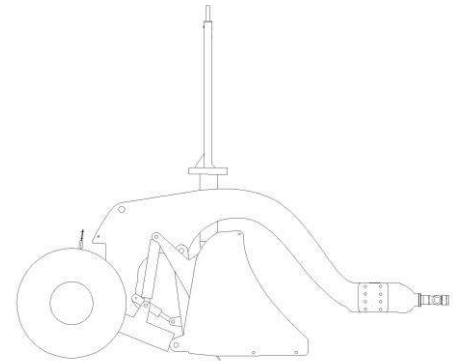


Overall length




Working width



Maneuver width



Work wheel track

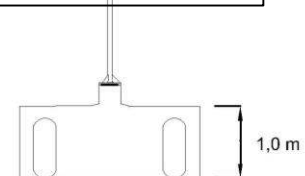

Blade height